

Cinquecento12

Compact, economic, modern


ECOTECHNICS

SIMPLY EFFICIENT

Cinquecento12 is the model designed for R134a or HFO refrigerants. The solid metal structure, the choice of known and tested components and the implementation of new technological standards make this station the most performing entry level on the global market.

Fully automatic A/C charging station for recovery, recycling and charging for R134a or HFO1234yf

- Configuration of the refrigerant during activation with the corresponding R134a or HFO kit
- Wide 4.3" touch screen display for an easy, fast and intuitive navigation
- Energy-saving with 12-volt solenoid valve technology
- Optional Hybrid kit for the flushing of service hoses and internal circuits. Indispensable for the service on systems with an electric compressor.
- Oil management both with standard refillable containers and with hermetic cartridges.
- WIFI connection available on request
- Complete database also including commercial and agricultural vehicles
- Thermal printer: factory option

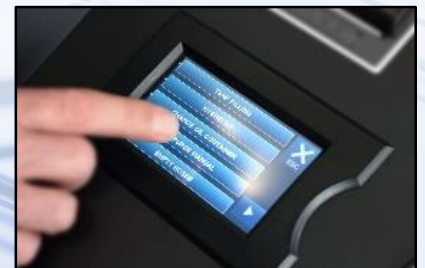

Y2V000000000	Cinquecento12
Y2V200000000	Cinquecento12 + printer
KIT.PLA0001	Front Cover

Cinquecento12

Compact, economic, modern

ECOTECHNICS

SIMPLY EFFICIENT

Cinquecento12 is the model designed for R134a or HFO refrigerants. The solid metal structure, the choice of known and tested components and the implementation of new technological standards make this station the most performing entry level on the global market.

Type of refrigerant	R134a or HFO1234yf
Display	4,3" colour touchscreen
Service valves	Manual
Thermal printer	Factory Option
Hermetic and refillable containers for oil and dye	Not available
Hermetic disposable containers for oil and dye	Option 1
Refillable standard containers for oil and dye	Standard 1
Hoses	3 meters
Data Base Car-Truck-Agri	Standard
Refrigerant Configuration	Standard
Hybrid function / electrically driven compressors	Option
Pressure test forming gas / nitrogen	Not available
Gas Identifier / Gas Analyser	Not available
Connectivity WIFI	Option
Flushing Kit	Not available
Leak check in vacuum	Non disponibile
Non condensable gas purge	Manual
Voltage	220-240V 50/60 Hz
Vacuum pump	51 l/min, vacuum level 0,2 mbar
Sealed compressor	1/3 HP
Recovery speed	300 g/min in liquid phase
Tank Scale resolution	10 gr
Oil scale resolution	-
Working temperature range	11/49 °C
Filter system	1 filter for humidity
Refrigerant tank	12 liters refillable
Bottle heater	Not available
Dimension / weight	cm 47 x 51 x 97, 54 kg
Dimension / weight with packaging	cm 69 x 70 x 122, 68 kg

STANDARD



Y2V000000000	Cinquecento12
Y2V200000000	Cinquecento12 + printer
KIT.PLA0001	Front Cover
Y1NH000000000	Refrigerant Kit HFO1234yf
Y1NR000000000	Refrigerant Kit R134a
Y1NH000000001	Refrigerant Kit HFO1234yf UK
Y1NR000000001	Refrigerant Kit R134a UK

OPTIONS



Front Plastic cover